




Underwater Instruments

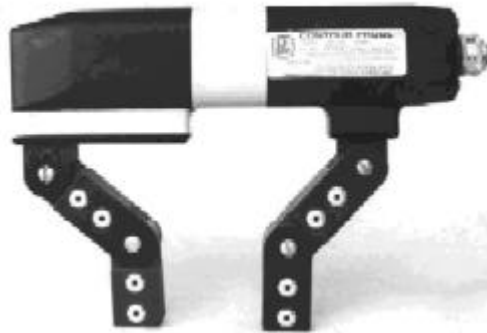

- UW12** Mini Underwater Contour Probe 12 VDC 2.5 amp, power supply or battery
For use where permanent magnets or full wave DC fields are permitted
- UW115** Mini Underwater Contour Probe 115 VAC 4 amp, power supply
Offers optimum results for surface breaking defects

Special Precaution: The UW 115 must be operated from a 115 VAC power source protected by a Ground Fault Interupter (GFI). Never operate the UW 115 from a DC power source.

Special Features: Leg sections are sealed between each laminate to prevent water migration into the unit.

A 3' power cord “pig tail” is molded into the probe body to allow for desired underwater connector or splice to user’s power cable.

Limited Warranty: 90 days from time of shipment. Parker will repair or replace defective unit only.